



Professional LED Landscape Light Manufacturer

FOANZO



Foanzo Lighting Technology Limited.

Tel:+86 755 29486393.

Fax:+86 755 29307246.

Email:info@foanzo.net.

Web:www.foanzo.net.

Add: 5th Floor, Building A, Baoying Industry Park, Wulian Community, Longgang District, Shenzhen, China.

About Us

Foanzo Lighting Technology Limited is one of the leading and innovative outdoor LED landscape lighting fixtures company.


Our company is committed to providing a complete and professional service to meeting the demands of a knowledgeable and discerning client base. Our dedicated team of experienced engineers is able to offer latest LED technical support to achieve a high quality cost efficient solution to their particular demands or design.

Our goal is to exceed our customers' expectations while working with them to develop professional, safe, economical solutions to their highest standards needs.

We provide our customers with the industry's highest quality products, manufacture, design and development support even after-sale service and product warranties to ensure the successful in their markets competition or project completion.

Since the year we established, we consistently continue to maintain the quality and services. Choose Foanzo, choose satisfaction!

Let us work together to service more customers, to create a wonderful life!



Index

CONTROLLER ————— Page 2



Ultrathin Par56 Bulb ————— Page 3



SUS316 Ultrathin surface mounted pool light ————— Page 4



ABS Ultrathin surface mounted pool light ————— Page 5



G53 Base ABS Par56 Bulb ————— Page 6



G53 Base SUS316 Par56 Bulb ————— Page 7



ABS surface mounted pool light ————— Page 8



ABS above ground pool light ————— Page 9



New!!!

Small ABS Spa Light ————— Page 10



SUS316 Underwater spot light ————— Page 11



SUS316 Rectangle underwater spot light ————— Page 12



SUS304 Underwater spot light ————— Page 13



SUS316 Embedded underwater light ————— Page 14



SUS304 Embedded underwater light ————— Page 15



SUS 316 fountain light ————— Page 16



SUS 304 fountain light ————— Page 17



In-ground light ————— Page 18



Wallwasher in-ground light ————— Page 19



COB in-ground light ————— Page 20



New!!!

Garden spike light ————— Page 21



Wall mounted garden light ————— Page 22



Step light ————— Page 23



Niche ————— Page 24



Transformer and DC power supply ————— Page 25



Equipments and tests ————— Page 26



RF REMOTE CONTROLLER



Product Code	Battery Model	Effect Distance (m)	Radio Frequency(Hz)
FZ-RF01	23A	100	433

4 WIRES RGB CONTROLLER



Product Code	Input Voltage(V)	Output Power(W)	Effect Distance (m)	Radio Frequency(Hz)
FZ-RGBC01	DC12/24	216W/432W (12V/24V)	100	433

RGB SYNCHRONOUS CONTROLLER



New G3.0!!




Product Code	Input Voltage(V)	Consumed Power(W)	Effect Distance (m)	Radio Frequency(Hz)
FZ-TC01	AC12	1.5	100	433

DMX 512 CONTROLLER



Product Code	Input Voltage(V)	Consumed Power(W)	Output Dignal	Control Quantity
FZ-DMXC01	DC12	2	Standard DMX512	512 DMX Channels

ABS Housing + PC Lens

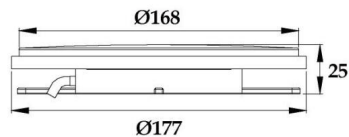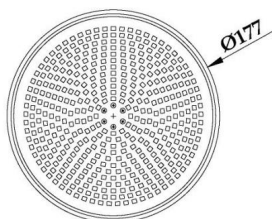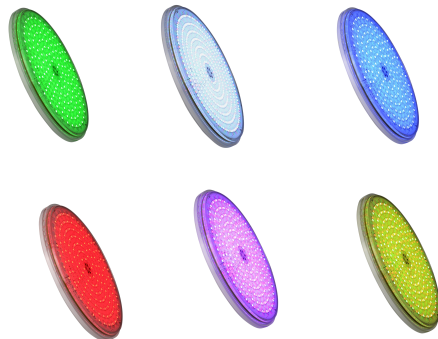

Single Color

Item	Power(W)	CCT(K)	Input Voltage(V)	Frequency(Hz)	IP Grade
FZ-PL01S15	15	3000/6000	AC12	50/60	IP68
FZ-PL01S20	20				
FZ-PL01S25	25				
FZ-PL01S30	30				

RGB Color - Switch + RF Remote Control

Item	Power(W)	Color	Input Voltage(V)	Frequency(Hz)	IP Grade
FZ-PL01MD15	15	RGB	AC12	50/60	IP68
FZ-PL01MD20	20				
FZ-PL01MD25	25				
FZ-PL01MD30	30				

RGB Color - Switch Control

Item	Power(W)	Color	Input Voltage(V)	Frequency(Hz)	IP Grade
FZ-PL01MK15	15	RGB	AC12	50/60	IP68
FZ-PL01MK20	20				
FZ-PL01MK25	25				
FZ-PL01MK30	30				



RGB Color - Synchronous control

Item	Power(W)	Color	Input Voltage(V)	Frequency(Hz)	IP Grade
FZ-PL01MT15	15	RGB	AC12	50/60	IP68
FZ-PL01MT20	20				
FZ-PL01MT25	25				
FZ-PL01MT30	30				

FZ-PL01-S SERIES

SUS316 Ultrathin surface mounted pool

ABS ultra-thin par56 bulb + SUS316 ring

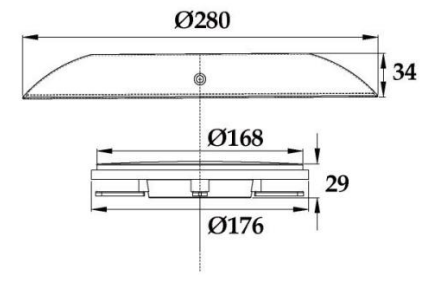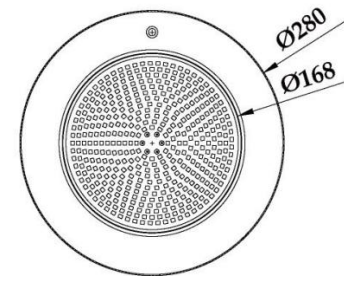

Single Color

Item	Power(W)	CCT(K)	Input Voltage(V)	Frequency(Hz)	IP Grade
FZ-PL01S15-S	15	3000/6000	AC12	50/60	IP68
FZ-PL01S20-S	20				
FZ-PL01S25-S	25				
FZ-PL01S30-S	30				

RGB Color - Switch Control

Item	Power(W)	Color	Input Voltage(V)	Frequency(Hz)	IP Grade
FZ-PL01MK15-S	15	RGB	AC12	50/60	IP68
FZ-PL01MK20-S	20				
FZ-PL01MK25-S	25				
FZ-PL01MK30-S	30				

RGB Color - Synchronous control


Item	Power(W)	Color	Input Voltage(V)	Frequency(Hz)	IP Grade
FZ-PL01MT15-S	15	RGB	AC12	50/60	IP68
FZ-PL01MT20-S	20				
FZ-PL01MT25-S	25				
FZ-PL01MT30-S	30				



FZ-PL01-P SERIES

ABS Ultrathin surface mounted pool light

ABS ultra-thin par56 bulb + ABS ring

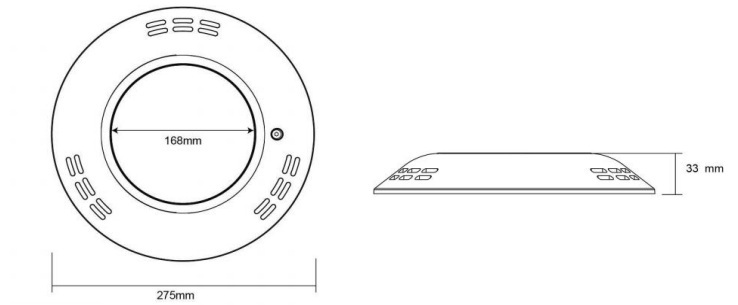

Single Color

Item	Power(W)	CCT(K)	Input Voltage(V)	Frequency(Hz)	IP Grade
FZ-PL01S15-P	15	3000/6000	AC12	50/60	IP68
FZ-PL01S20-P	20				
FZ-PL01S25-P	25				
FZ-PL01S30-P	30				

RGB Color - Switch Control

Item	Power(W)	Color	Input Voltage(V)	Frequency(Hz)	IP Grade
FZ-PL01MK15-P	15	RGB	AC12	50/60	IP68
FZ-PL01MK20-P	20				
FZ-PL01MK25-P	25				
FZ-PL01MK30-P	30				




RGB Color - Synchronous control

Item	Power(W)	Color	Input Voltage(V)	Frequency(Hz)	IP Grade
FZ-PL01MT15-P	15	RGB	AC12	50/60	IP68
FZ-PL01MT20-P	20				
FZ-PL01MT25-P	25				
FZ-PL01MT30-P	30				



FZ-PL02 SERIES G53 base ABS Par56 bulb

ABS housing + PC lens

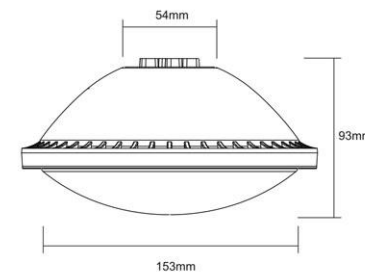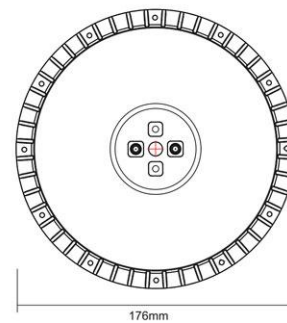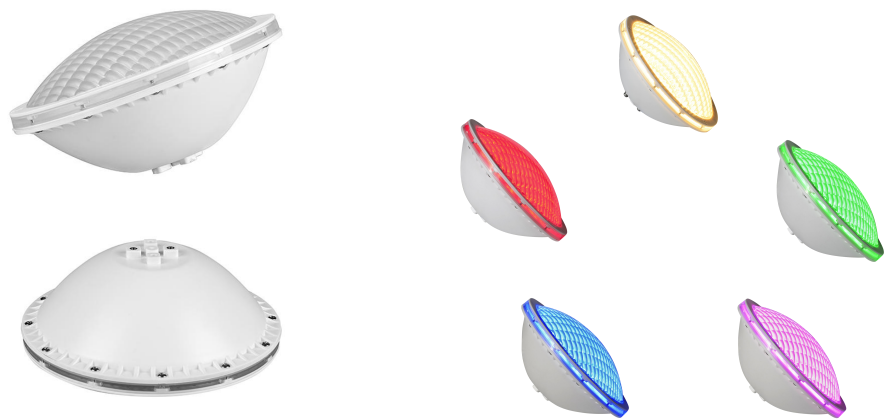

Single Color

Item	Power(W)	CCT(K)	Input Voltage(V)	Frequency(Hz)	IP Grade
FZ-PL02S15	15	3000/6000	AC12	50/60	IP68
FZ-PL02S18	18				

RGB Color - Switch + RF Remote Control

Item	Power(W)	Color	Input Voltage(V)	Frequency(Hz)	IP Grade
FZ-PL02MD15	15	RGB	AC12	50/60	IP68
FZ-PL02MD20	20				

RGB Color - Switch Control


Item	Power(W)	Color	Input Voltage(V)	Frequency(Hz)	IP Grade
FZ-PL02MK15	15	RGB	AC12	50/60	IP68
FZ-PL02MK20	20				

RGB Color - Synchronous control

Item	Power(W)	Color	Input Voltage(V)	Frequency(Hz)	IP Grade
FZ-PL02MT15	15	RGB	AC12	50/60	IP68
FZ-PL02MT20	20				

FZ-PL03 SERIES G53 base SUS316 Par56 bulb

SUS316 housing + PC lens

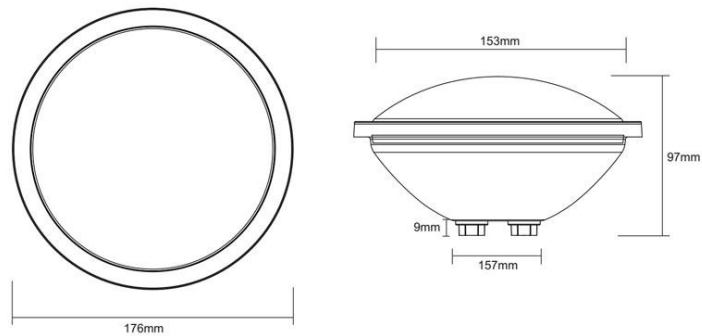

Single Color

Item	Power(W)	CCT(K)	Input Voltage(V)	Frequency(Hz)	IP Grade
FZ-PL03S15	15	3000/6000	AC12	50/60	IP68
FZ-PL03S20	20				
FZ-PL03S25	25				
FZ-PL03S30	30				
FZ-PL03S20H	20				
FZ-PL03S30H	30				

RGB Color - Switch Control

Item	Power(W)	Color	Input Voltage(V)	Frequency(Hz)	IP Grade
FZ-PL03MK15	15	RGB	AC12	50/60	IP68
FZ-PL03MK20	20				
FZ-PL03MK25	25				
FZ-PL03MK30	30				
FZ-PL03MK20H	20				
FZ-PL03MK30H	30				



RGB Color - Synchronous Control

Item	Power(W)	Color	Input Voltage(V)	Frequency(Hz)	IP Grade
FZ-PL03MT15	15	RGB	AC12	50/60	IP68
FZ-PL03MT20	20				
FZ-PL03MT25	25				
FZ-PL03MT30	30				
FZ-PL03MT20H	20				
FZ-PL03MT30H	30				

FZ-PL04 SERIES

ABS Surface mounted pool light

ABS housing + PC lens

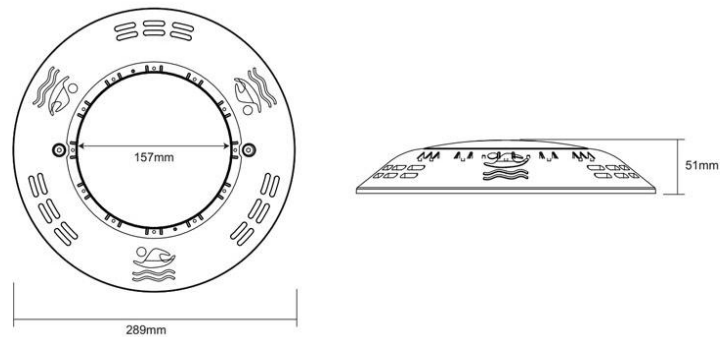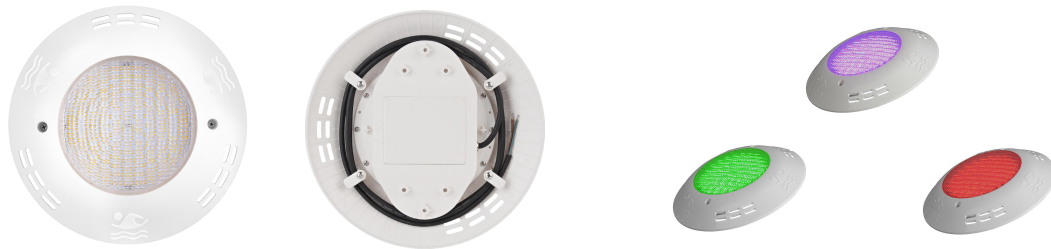

Single Color					
Item	Power(W)	CCT(K)	Input Voltage(V)	Frequency(Hz)	IP Grade
FZ-PL04S15	15	3000/6000	AC12	50/60	IP68
FZ-PL04S20	20				
FZ-PL04S25	20				

RGB Color - Switch + RF Remote Control					
Item	Power(W)	Color	Input Voltage(V)	Frequency(Hz)	IP Grade
FZ-PL04MD15	15	RGB	AC12	50/60	IP68
FZ-PL04MD20	20				
FZ-PL04MD25	25				
FZ-PL04MD20H	20				
FZ-PL04MD25H	25				

RGB Color - Switch Control					
Item	Power(W)	Color	Input Voltage(V)	Frequency(Hz)	IP Grade
FZ-PL04MK15	15	RGB	AC12	50/60	IP68
FZ-PL04MK20	20				
FZ-PL04MK25	25				
FZ-PL04MK20H	20				
FZ-PL04MK25H	25				

RGB Color - Synchronous Control					
Item	Power(W)	Color	Input Voltage(V)	Frequency(Hz)	IP Grade
FZ-PL04MT15	15	RGB	AC12	50/60	IP68
FZ-PL04MT20	20				
FZ-PL04MT25	25				
FZ-PL04MT20H	20				
FZ-PL04MT25H	25				



FZ-PL08 SERIES

ABS Above ground pool light

ABS housing + PC lens



THE TOTAL LENGTH OF THE LINE IS 26FEET(8.0M)
WHICH IS MORE CONVENIENT TO USE.

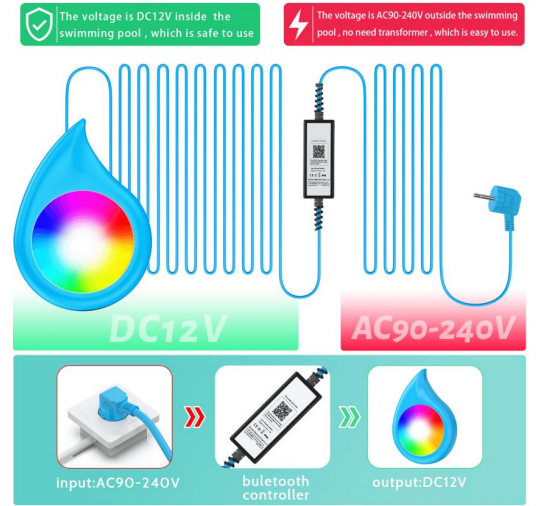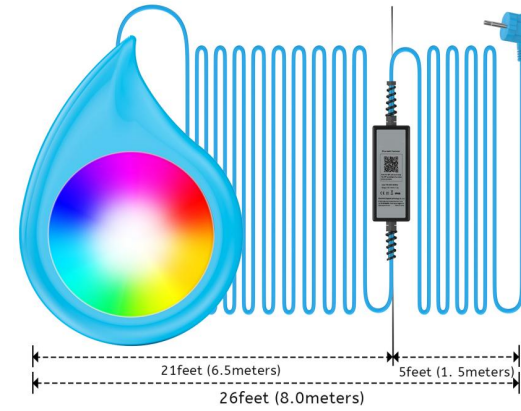


Single Color

Item	Power(W)	CCT(K)	Input Voltage(V)	Frequency(Hz)	IP Grade
FZ-PL08S10	10	3000/6000	AC90~240	50/60	IP68
FZ-PL08S20	20				


RGB Color -Bluetooth control

Item	Power(W)	Color	Input Voltage(V)	Frequency(Hz)	IP Grade
FZ-PL08CB10	10	RGB	AC90~240	50/60	IP68
FZ-PL08CB20	20				

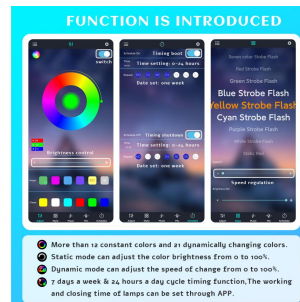

FZ-SP01 SERIES ABS Spa light

ABS housing + PC lens

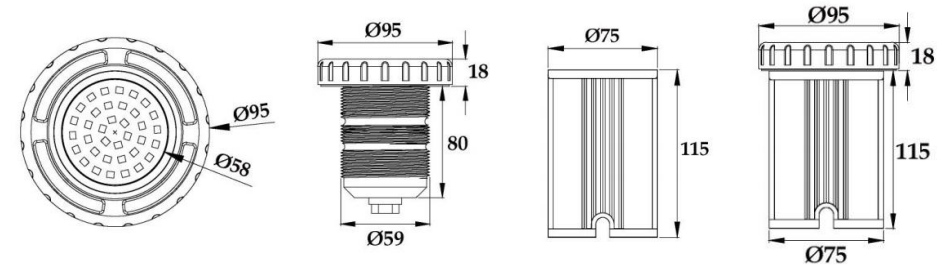

Single Color

Item	Power(W)	CCT(K)	Input Voltage(V)	LEDs Type	Frequency(Hz)	IP Grade
FZ-SP01S36	3	3000/6000	AC12	SMD2835	50/60	IP68
FZ-SP01S3x1	3			High power LEDs		

RGB Color - Switch Control

Item	Power(W)	Color	Input Voltage(V)	LEDs Type	Frequency(Hz)	IP Grade
FZ-SP01MK36	3	RGB	AC12	SMD2835	50/60	IP68
FZ-SP01MK3x1	3			High power LEDs		


RGB Color - 4 Wires RGB control

Item	Power(W)	Color	Input Voltage(V)	LEDs Type	Frequency(Hz)	IP Grade
FZ-SP01M36	3	RGB	AC12	SMD2835	50/60	IP68
FZ-SP01M3x1	3			High power LEDs		



FZ-US01 SERIES SUS316 Underwater spot light

SUS316 housing + Tempered glass

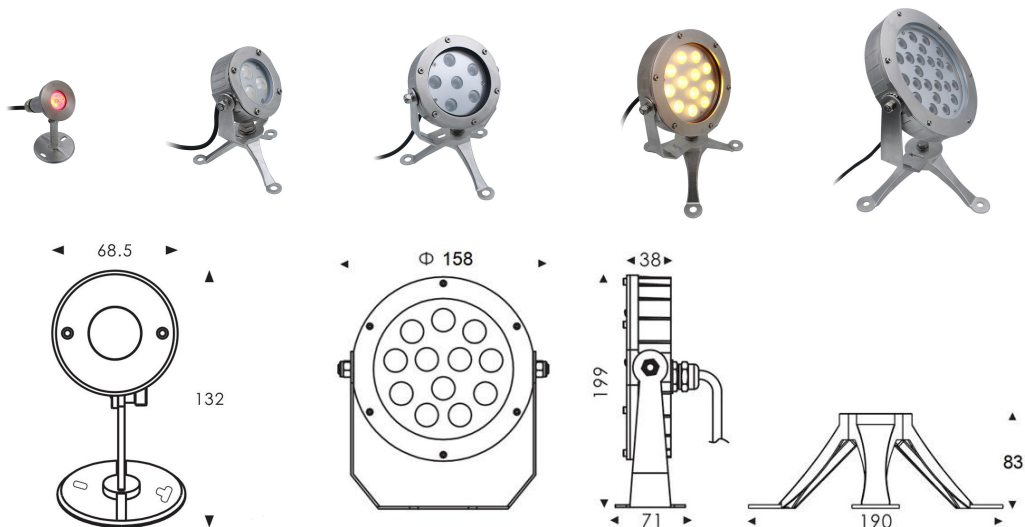

Single Color

Item	Power(W)	CCT(K)	Input Voltage(V)	Beam Angle	Size (mm)	IP Grade
FZ-US01S1x2	2	3000/6000	DC12/24	15/20/45/60°	D61 x H132	IP68
FZ-US01S3x2	6				D90 x H161	
FZ-US01S6x2	12		DC24		D130 x H225	
FZ-US01S12x2	24				D158 x H282	
FZ-US01S18x2	36				D220 x H354	

RGB Color - 4 Wires RGB Control


Item	Power(W)	Color	Input Voltage(V)	Beam Angle	Size (mm)	IP Grade
FZ-US01M1x3	3	RGB	DC12/24	30°	D61 x H132	IP68
FZ-US01M3x3	9				D90 x H161	
FZ-US01M6x3	18		DC24		D130 x H225	
FZ-US01M12x3	36				D158 x H282	
FZ-US01M18x3	54				D220 x H354	

DMX Color - 5 Wires DMX512 Control

Item	Power(W)	Color	Input Voltage(V)	Beam Angle	Size (mm)	IP Grade
FZ-US01DMX1x3	3	RGB	DC12/24	30°	D61 x H132	IP68
FZ-US01DMX3x3	9				D90 x H161	
FZ-US01DMX6x3	18		DC24		D130 x H225	
FZ-US01DMX12x3	36				D158 x H282	
FZ-US01DMX18x3	54				D220 x H354	

FZ-US02 SERIES SUS316 Rectangle Underwater spot light

SUS316 housing + Tempered glass

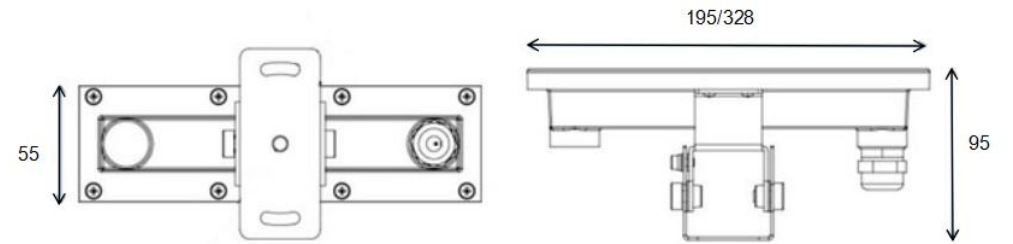

Single Color

Item	Power(W)	CCT(K)	Input Voltage(V)	Beam Angle	Size(mm)	IP Grade
FZ-US02S3x2	6	3000/6000	DC24	15/20/45/60°	L195 x W55 x H95	IP68
FZ-US02S6x2	12				L328 x W55 x H95	

RGB Color - 4 Wires RGB Control



Item	Power(W)	Color	Input Voltage(V)	Beam Angle	Size(mm)	IP Grade
FZ-US02M3x3	9	RGB	DC24	30°	L195 x W55 x H95	IP68
FZ-US02M6x3	18				L328 x W55 x H95	

DMX Color - 5 Wires DMX512 Control

Item	Power(W)	Color	Input Voltage(V)	Beam Angle	Size(mm)	IP Grade
FZ-US02DMX3x3	9	RGB	DC24	30°	L195 x W55 x H95	IP68
FZ-US02DMX6x3	18				L328 x W55 x H95	

FZ-US03 SERIES SUS304 Underwater spot light

SUS304 housing + Tempered glass

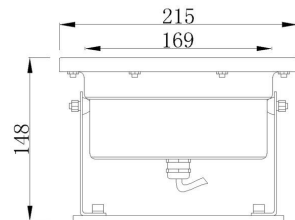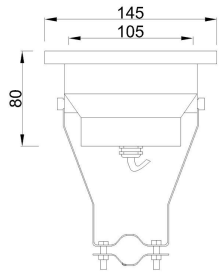

Single Color

Item	Power(W)	CCT(K)	Input Voltage(V)	Beam Angle	Size(mm)	IP Grade
FZ-US03S3x1	3	3000/6000	DC24	10/30/60/90°	D120 x H135	IP68
FZ-US03S6x1	6					
FZ-US03S6x3	18					
FZ-US03S9x1	9					
FZ-US03S12x1	12					
FZ-US03S9x3	27					
FZ-US03S18x1	18					
FZ-US03S12x3	36				D190 x H130	

RGB Color - 4 Wires RGB Control

Item	Power(W)	Color	Input Voltage(V)	Beam Angle	Size(mm)	IP Grade
FZ-US03M3x1	3	RGB	DC24	10/30/60/90°	D120 x H135	IP68
FZ-US03M6x1	6					
FZ-US03M6x3	18					
FZ-US03M9x1	9					
FZ-US03M12x1	12					
FZ-US03M9x3	27					
FZ-US03M18x1	18					
FZ-US03M12x3	36				D190 x H130	

DMX Color - 5 Wires DMX512 Control


Item	Power(W)	Color	Input Voltage(V)	Beam Angle	Size(mm)	IP Grade
FZ-US03DMX3x1	3	RGB	DC24	10/30/60/90°	D120 x H135	IP68
FZ-US03DMX6x1	6					
FZ-US03DMX6x3	18					
FZ-US03DMX9x1	9					
FZ-US03DMX12x1	12					
FZ-US03DMX9x3	27					
FZ-US03DMX18x1	18					
FZ-US03DMX12x3	36				D190 x H130	

FZ-UR01 SERIES SUS316 Embedded underwater light

SUS316 housing + Tempered glass



45|35° Asymmetric Lens

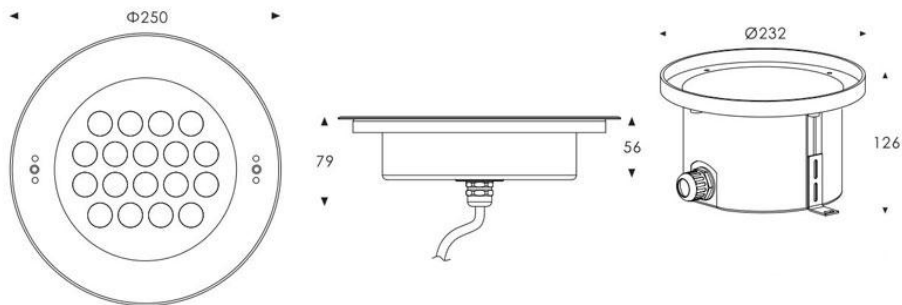




Single Color						
Item	Power(W)	CCT(K)	Input Voltage(V)	Beam Angle	Size (mm)	IP Grade
FZ-UR01S1x2	2	3000/6000	DC12/24	15/30/45/60°	D68.5 x H95	IP68
FZ-UR01S1x2A	2			45 35°		
FZ-UR01S4x2	8		DC24	15/30/45/60°	D135 x H58	
FZ-UR01S4x2A	8			45 35°		
FZ-UR01S6x2	12		DC24	15/30/45/60°	D180 x H77	
FZ-UR01S6x2A	12			45 35°		
FZ-UR01S12x2	24		DC24	15/30/45/60°	D205 x H88	
FZ-UR01S12x2A	24			45 35°		
FZ-UR01S18x2	36		DC24	15/30/45/60°	D250 x H79	
FZ-UR01S18x2A	36			45 35°		

RGB Color - 4 Wires RGB Control						
Item	Power(W)	Color	Input Voltage(V)	Beam Angle	Size (mm)	IP Grade
FZ-UR01M1x3	3	RGB	DC12/24	30°	D68.5 x H95	IP68
FZ-UR01M4x3	12		DC24		D135 x H58	
FZ-UR01M6x3	18				D180 x H77	
FZ-UR01M12x3	36		D205 x H88			
FZ-UR01M18x3	54		D250 x H79			

DMX Color - 5 Wires DMX512 Control						
Item	Power(W)	Color	Input Voltage(V)	Beam Angle	Size (mm)	IP Grade
FZ-UR01DMX1x3	3	RGB	DC12/24	30°	D68.5 x H95	IP68
FZ-UR01DMX4x3	12		DC24		D135 x H58	
FZ-UR01DMX6x3	18				D180 x H77	
FZ-UR01DMX12x3	36		D205 x H88			
FZ-UR01DMX18x3	54		D250 x H79			

FZ-UR02 SERIES SUS304 Embedded underwater light

SUS304 housing + Tempered glass

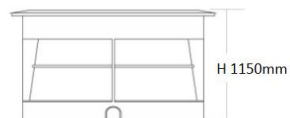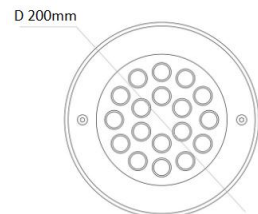

Single Color

Item	Power(W)	CCT(K)	Input Voltage(V)	Beam Angle	Size (mm)	IP Grade
FZ-UR02S1x1	1	3000/6000	DC12/24	15/30/45/60°	D52 x H80	IP68
FZ-UR02S1x3	3				D100 x H75	
FZ-UR02S3x1	3				D130 x H110	
FZ-UR02S6x1	6		DC24		D165 x H125	
FZ-UR02S9x1	9				D200 x H115	
FZ-UR02S12x1	12					
FZ-UR02S15x1	15					
FZ-UR02S18x1	18					

RGB Color - 4 Wires RGB control


Item	Power(W)	Color	Input Voltage(V)	Beam Angle	Size (mm)	IP Grade
FZ-UR02M1x3	3	RGB	DC12/24	15/30/45/60°	D52 x H80	IP68
FZ-UR02M3x1	3				D100 x H75	
FZ-UR02M6x1	6				D130 x H110	
FZ-UR02M9x1	9		DC24		D165 x H125	
FZ-UR02M12x1	12				D200 x H115	
FZ-UR02M15x1	15					
FZ-UR02M18x1	18					

DMX Color - 5 Wires DMX512 Control

Item	Power(W)	Color	Input Voltage(V)	Beam Angle	Size (mm)	IP Grade	
FZ-UR02DMX3x1	3	RGB	DC24	15/30/45/60°	D100 x H75	IP68	
FZ-UR02DMX6x1	6				D130 x H110		
FZ-UR02DMX9x1	9				D165 x H125		
FZ-UR02DMX12x1	12						D200 x H115
FZ-UR02DMX15x1	15						
FZ-UR02DMX18x1	18						

FZ-FT01 SERIES SUS304 Fountain light

SUS304 housing + Tempered glass

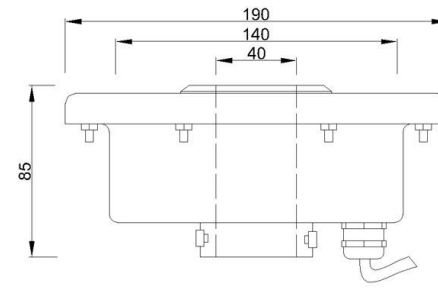

Single Color

Item	Power(W)	CCT(K)	Input Voltage(V)	Beam Angle	Size (mm)	IP Grade
FZ-FT01S6x1	6	3000/6000	DC24	10/30/60/90°	D145 x H80	IP68
FZ-FT01S9x1	9				D170 x H75	
FZ-FT01S6x3	18					
FZ-FT01S12x1	12					
FZ-FT01S9x3	27					

RGB Color - 4 Wires RGB Control



Item	Power(W)	Color	Input Voltage(V)	Beam Angle	Size (mm)	IP Grade
FZ-FT01M6x1	6	RGB	DC24	10/30/60/90°	D145 x H80	IP68
FZ-FT01M9x1	9				D170 x H75	
FZ-FT01M6x3	18					
FZ-FT01M12x1	12					
FZ-FT01M9x3	27					

DMX Color - 5 Wires DMX512 Control


Item	Power(W)	Color	Input Voltage(V)	Beam Angle	Size (mm)	IP Grade
FZ-FT01DMX6x1	6	RGB	DC24	10/30/60/90°	D145 x H80	IP68
FZ-FT01DMX9x1	9				D170 x H75	
FZ-FT01DMX6x3	18					
FZ-FT01DMX12x1	12					
FZ-FT01DMX9x3	27					

FZ-FT02 SERIES SUS316 Fountain nozzle light

SUS316 housing + Tempered glass

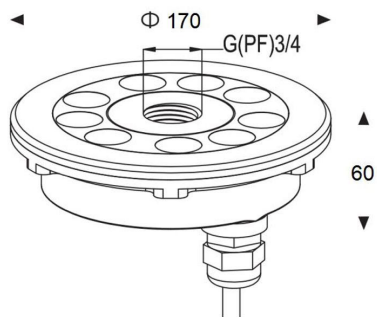

Water jet pipe
G 1 1/2" taper

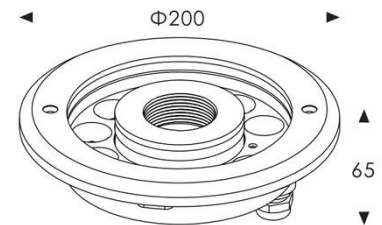

Single Color

Item	Power(W)	CCT(K)	Input Voltage(V)	Beam Angle	Size(mm)	IP Grade
FZ-FT02S9x2	18	3000/6000	DC24	15/20/45/60°	D170 x H60	IP68
FZ-FT03S9x2	18				D200 x H65	
FZ-FT03S12x2	24					

RGB Color - 4 Wires RGB Control

Item	Power(W)	Color	Input Voltage(V)	Beam Angle	Size(mm)	IP Grade
FZ-FT02M9x2	9	RGB	DC24	15/20/45/60°	D170 x H60	IP68
FZ-FT03M9x2	18				D200 x H65	
FZ-FT03M12x2	24					

DMX Color - 5 Wires DMX512 Control

Item	Power(W)	Color	Input Voltage(V)	Beam Angle	Size(mm)	IP Grade
FZ-FT02DMX9x2	9	RGB	DC24	15/20/45/60°	D170 x H60	IP68
FZ-FT03DMX9x2	18				D200 x H65	
FZ-FT03DMX12x2	24					

FZ-IG01 SERIES

Embedded in-ground light

Powder coated aluminum housing + SUS316 surface cover+Tempered glass



Single Color

Item	Power(W)	CCT(K)	Input Voltage(V)	Beam Angle	Size (mm)	IP Grade
FZ-IG01S1x2	2	3000/6000	DC12/24	15/30/45/60°	D55x H82	IP67
FZ-IG01S1x2A				45 35°		
FZ-IG01S1x2H			AC120/240	15/30/45/60°		
FZ-IG01S1x2AH				45 35°		
FZ-IG01S3x2	6		DC24	15/30/45/60°	D116 x H97	
FZ-IG01S3x2A						
FZ-IG01S3x2H			AC120/240	15/30/45/60°		
FZ-IG01S3x2AH						
FZ-IG01S6x2	12		DC24	15/30/45/60°	D173 x H77	
FZ-IG01S6x2A						
FZ-IG01S6x2H			AC120/240	15/30/45/60°		
FZ-IG01S6x2AH						
FZ-IG01S9x2	18	DC24	15/30/45/60°	D173 x H77		
FZ-IG01S9x2A					45 35°	
FZ-IG01S9x2H		AC120/240	15/30/45/60°			
FZ-IG01S9x2AH					45 35°	
FZ-IG01S12x2	24	DC24	15/30/45/60°	D185 x H75		
FZ-IG01S12x2A					45 35°	
FZ-IG01S12x2H		AC120/240	15/30/45/60°			
FZ-IG01S12x2AH					45 35°	

RGB Color - 4 Wires RGB Control

Item	Power (W)	Color	Input Voltage(V)	Beam Angle	Size (mm)	IP Grade
FZ-IG01M1x3	3	RGB	DC24	30°	D55x H82	IP67
FZ-IG01M3x3	9				D135 x H58	
FZ-IG01M6x3	18				D173 x H77	
FZ-IG01M9x3	27				D173 x H77	
FZ-IG01M12x3	36				D185 x H75	





FZ-IG02 SERIES

Embedded wall washer in-ground light

Powder coated aluminum housing + SUS316 surface cover+Tempered glass



45|35° Asymmetric Lens

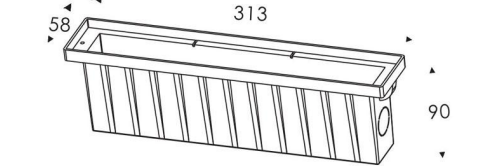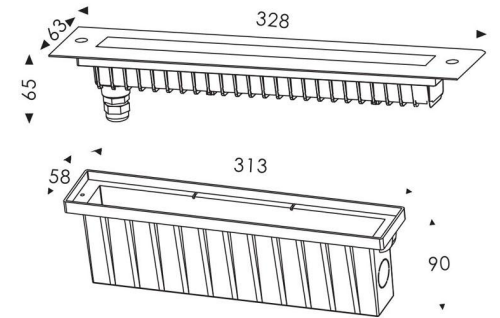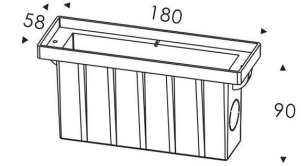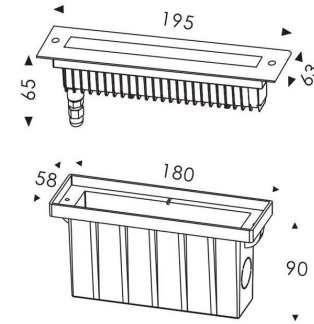

Single Color

Item	Power (W)	CCT(K)	Input Voltage(V)	Beam Angle	Size (mm)	IP Grade
FZ-IG02S3x2	6	3000/6000	DC24	15/30/45/60°	L195 x W63 x H65	IP67
FZ-IG02S3x2A	6			45 35°		
FZ-IG02S3x2H	6		AC120/240	15/30/45/60°		
FZ-IG02S3x2AH	6			45 35°		
FZ-IG02S6x2	12		DC24	15/30/45/60°	L328 x W63 x H65	
FZ-IG02S6x2A	12			45 35°		
FZ-IG02S6x2H	12		AC120/240	15/30/45/60°		
FZ-IG02S6x2AH	12			45 35°		


RGB Color - 4 Wires RGB Control

Item	Power(W)	Color	Input Voltage(V)	Beam Angle	Size (mm)	IP Grade
FZ-IG02M3x3	3	RGB	DC24	30°	L195 x W63 x H65	IP67
FZ-IG02M6x3	18				L328 x W63 x H65	

FZ-IG03 SERIES

COB Embedded in-ground light

Die-cast aluminum housing + SUS304 surface cover+Tempered glass

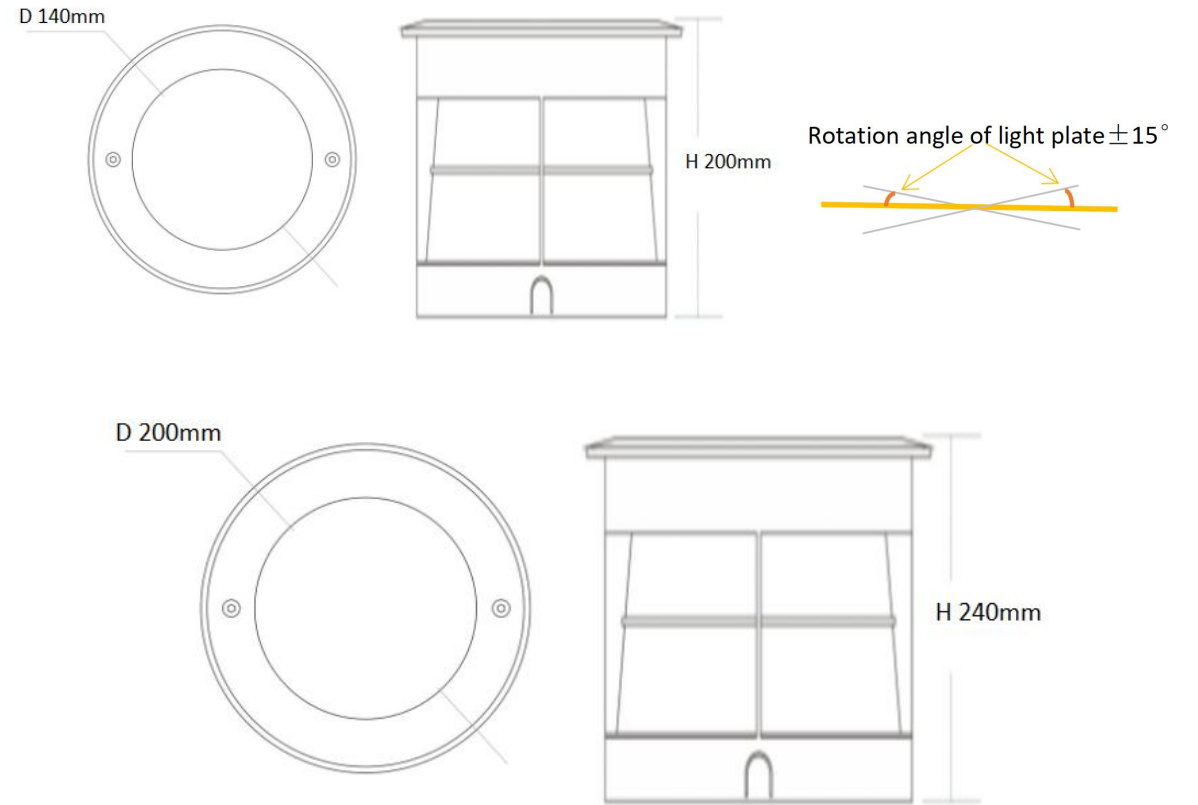


Single Color

Item	Power(W)	Color	Input Voltage(V)	Beam Angle	Rotation angle	Size (mm)	IP Grade
FZ-IG02S3C	3	3000/6000	AC85~265	30°	$\pm 15^\circ$	D105 x H140	IP66
FZ-IG02S7C	7					D140 x H200	
FZ-IG02S12C	12					D170 x H245	
FZ-IG02S15C	15					D195 x H240	
FZ-IG02S20C	20					D220 x H290	

FZ-GD01 SERIES Garden spike / wall mounted light

Aluminum Anodized Finishing Housing + Tempered glass

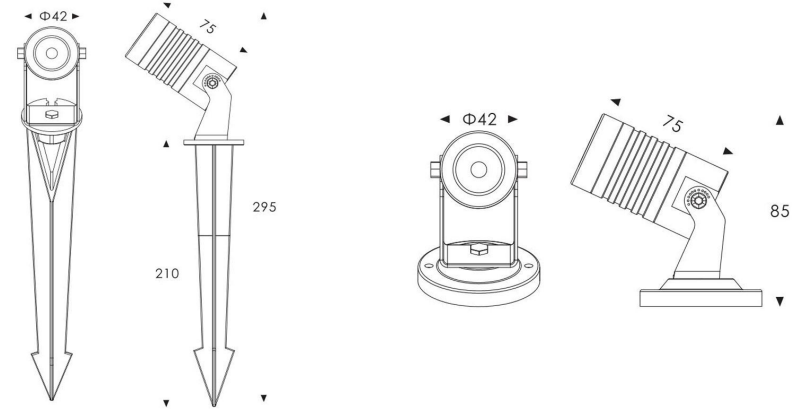

Single Color


Item	Power(W)	CCT(K)	Input Voltage(V)	Beam Angle	Size (mm)	IP Grade
FZ-GD01S1x2	2	3000/6000	DC12/24	15/30/45/60°	D42 x H295	IP65
FZ-GD01S1x2H	2		AC1120/240			
FZ-GD01S1x2M	2		DC24		D42 x H85	
FZ-GD01S1x2MH	2		AC1120/240			

RGB Color - 4 Wires RGB Control

Item	Power(W)	Color	Input Voltage(V)	Beam Angle	Size (mm)	IP Grade
FZ-GD01M1x3	3	RGB	DC12/24	30°	D42 x H295	IP65
FZ-GD01M1x3M	3		DC24		D42 x H85	

FZ-GD03 SERIES Garden spike / wall mounted light

Die-cast aluminum housing + Tempered glass

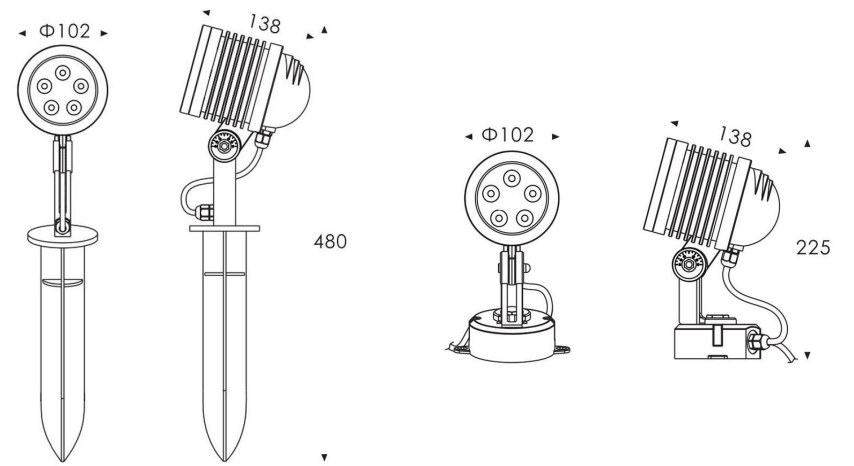

Single Color







Item	Power(W)	CCT(K)	Input Voltage(V)	Beam Angle	Size (mm)	IP Grade
FZ-GD03S6x2	12	3000/6000	DC24	15/30/45/60°	D102 x H480	IP65
FZ-GD03S6x2H	12		AC1120/240			
FZ-GD03S6x2M	12		DC24		D102 x H225	
FZ-GD03S6x2MH	12		AC1120/240			

RGB Color - 4 Wires RGB Control

Item	Power(W)	Color	Input Voltage(V)	Beam Angle	Size (mm)	IP Grade
FZ-GD03M6x3	18	RGB	DC24	30°	D102 x H480	IP65
FZ-GD03M6x3M	18		DC24		D102 x H225	






FZ-WR SERIES Wall & Step light

Aluminum Anodized Finishing Housing

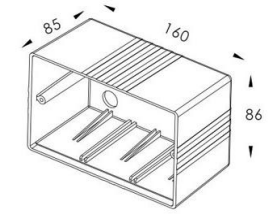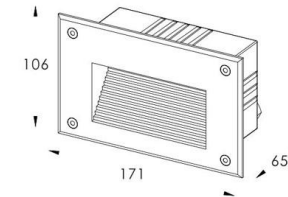

Single Color

Item	Power(W)	Color	Input Voltage(V)	Beam Angle	Size (mm)	IP Grade	
FZ-WR01S1x2	2	3000/6000	DC24	80	D80xH76	IP65	
FZ-WR01S1x2H	2		AC120/240				
FZ-WR02S12	1.4		DC24	120	L171xW106xH85		
FZ-WR02S12H	1.6		AC120/240				
FZ-WR02S24	2.6		DC24				
FZ-WR02S24H	2.8		AC120/240				
FZ-WR03S12	1.4		DC24				L120xW120xH95
FZ-WR03S12H	1.6		AC120/240				
FZ-WR03S24	2.6		DC24	L160xW160xH112			
FZ-WR03S24H	2.8		AC120/240				



Compatible Niche Brand

Bulb Type	Pic	Niche Brand	Pic
Ultrathin Par56 Bulb		Chinese	
		Astralpool	
		Hayward Europe	
Plastic Par56 Bulb SS316 Par56 Bulb		Chinese	
		Astralpool	
		Swim-Tec Germany	
		Hayward Europe	


Niche

FZ-NC290



Concrete
pool niche

Vinyl/Liner
pool niche

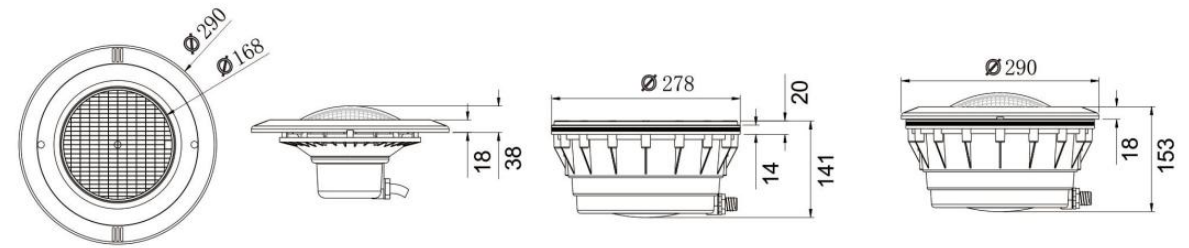


FZ-NC280



Concrete
pool niche



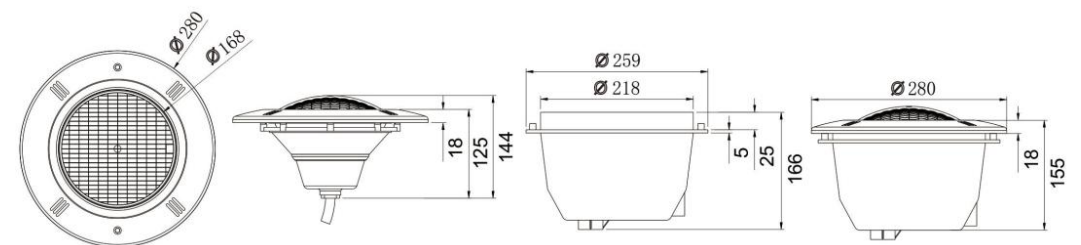


Vinyl/Liner
pool niche









Transformer



Waterproof Type

Item	Pic	Power(W)	Input Voltage(V)	Output Voltage(V)	IP Grade	Weight(KG)
FZ-WTS100		100	AC220±10%	AC12	IP65	2.2
FZ-WTS200		200				3.5
FZ-WTS400		400				6.2
FZ-WTS600		600				8.8
FZ-WTS1000		1000				11.0






Non-Waterproof Type

Item	Pic	Power(W)	Input Voltage(V)	Output Voltage(V)	IP Grade	Weight(KG)
FZ-TS105		105	AC220±10%	AC12	IP20	2.2
FZ-TS200		200				3.5
FZ-TS300		400				6.2
FZ-TS500		600				8.8
FZ-TS1000		1000				11.0
FZ-TS2000		2000				11.0






DC Power supply



Waterproof Type

Item	Pic	Power(W)	Input Voltage(V)	Output Voltage(V)	IP Grade	Weight(KG)
HLG-100		100	AC90-305	DC12/24	IP65/67	1.12
HLG-240		240				3.5
HLG-320		320				6.2
HLG-480		480				8.8
HLG-600		600				11.0

Non-Waterproof Type

Item	Pic	Power(W)	Input Voltage(V)	Output Voltage(V)	IP Grade	Weight(KG)
NES-100		100	AC120/240	DC12/24	IP20	0.55
NES-200		200				0.93
NES-350		350				1.07
SE-450		450				1.25
SE-600		600				2.10

Equipment And Test

Integral ball



Aging test



Water tank for IP66/67 test



IP68 High pressure cylinder



Transportation

